


Coating PLATE for Offset Coating

Rubber Surface (EPDM) | Polyester Carrier | Excellent for UV Coating Applications

PRODUCT FEATURES

- Perfect solution for UV coating & Metal Decoration
- No ink build up surface technology
- Smooth surface for optimum coating transfer of all kind of UV coatings
- Cutting both manual and with CAD plotter
- Outstanding durability offers longlife
- Bi-Directional-Cutting
- suitable for food packaging
- High chemical and mechanical resistance

PRODUCT PROFILE

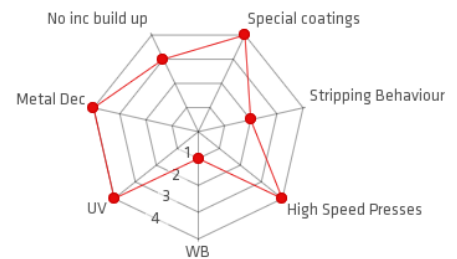

1 = not suggested
2 = suitable
3 = excellent
4 = optimum

TECHNICAL SPECIFICATION

Surface (Rubber / Polymer)	Rubber
Micro-Hardness	60Å° Shore A
Thickness (Tolerance +/- 0.03mm)	1.15mm (0.045") 1.35mm (0.053") 1.95mm (0.077")
Stripping Depth	1.15mm = 0.80 mm (0.031â€) 1.35mm = 1.00 mm (0.040â€) 1.95mm = 1.60 mm (0.063â€)
Roll width	1080mm (42 1/2") 1320mm (52") 1480mm (58 1/4") 1580mm (62 1/4")
Roll length	30m / 50m
Carrier (Polyester PET / Fabric)	Polyester PET (0.35mm)

CROSS SECTION

