


Coating PLATE for Offset Coating

PREMIUM ALL IN ONE | Rubber Surface | High Speed | Polyester Carrier | Compressible

PRODUCT FEATURES

- Smooth surface provides optimum coating transfer of water based (aqueous) and UV coating applications
- No ink build up surface technology
- Excellent for high speed presses
- Easy cutting (CAD & manual) & stripping technology
- Superior for Gloss, Matt and Soft Touch coatings
- Bi-Directional-Cutting
- Suitable for food packaging
- High delamination resistance even in long-run UV

PRODUCT PROFILE

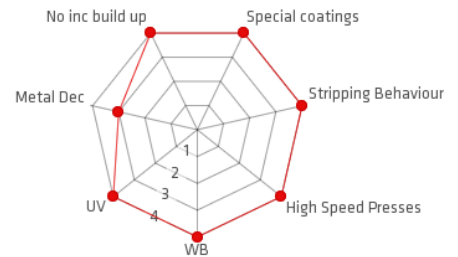

1 = not suggested
 2 = suitable
 3 = excellent
 4 = optimum

TECHNICAL SPECIFICATION

Surface (Rubber / Polymer)	Rubber
Micro-Hardness	60° Shore A
Thickness (Tolerance +/- 0.03mm)	1.15 mm (0.045") 1.35 mm (0.053") 1.95 mm (0.077")
Stripping Depth	1.15 mm = 0.80 mm (0.031") 1.35 mm = 1.00 mm (0.040") 1.95 mm = 1.60 mm (0.063")
Roll width	1080 mm (42 1/2") 1280 mm (52") 1480 mm (58 1/4") 1580 mm (62 1/4")
Roll length	30m / 50m
Carrier (Polyester PET / Fabric)	Polyester PET (0.35 mm)

CROSS SECTION

