


Coating PLATE for Offset Coating

Rubber Surface | Polyester Carrier

PRODUCT FEATURES

- Suitable for water based (aqueous) and UV coating applications
- No ink build up surface technology
- Smooth surface provides optimum coating transfer
- Easy cutting both manual and with CAD plotter
- Very durable offers longlife, reusable
- Bi-Directional-Cutting
- suitable for food packaging
- High delamination resistance

PRODUCT PROFILE

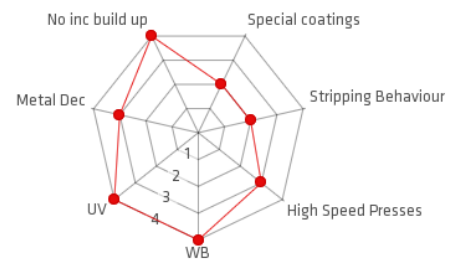

1 = not suggested
2 = suitable
3 = excellent
4 = optimum

TECHNICAL SPECIFICATION

Surface (Rubber / Polymer)	Rubber
Micro-Hardness	65° Shore A
Thickness (Tolerance +/- 0.03mm)	1.15mm (0.045") 1.35mm (0.053")
Stripping Depth	1.15mm = 0.80mm (0.031") 1.35mm = 1.00mm (0.040")
Roll width	1080mm (42 1/2") 1320mm (52") 1480mm (58 1/4") 1580mm (62 1/4") 1680mm (66")
Roll length	30m / 50m
Carrier (Polyester PET / Fabric)	Polyester PET (0.35mm)

CROSS SECTION

