


Coating PLATE for Offset Coating

Allround WB & UV | Polymer Surface | Polyester Carrier

PRODUCT FEATURES

- Smooth polymer surface provides optimum coating transfer for water based (aqueous) and UV coating applications
- No ink build up characteristics
- Smooth polymer surface for optimal coating transfer for matt and high-gloss finishes
- Easy to cut manually or with CAD plotters
- Durable and reusable for long service life
- Bi-Directional-Cutting
- Suitable for food packaging

PRODUCT PROFILE

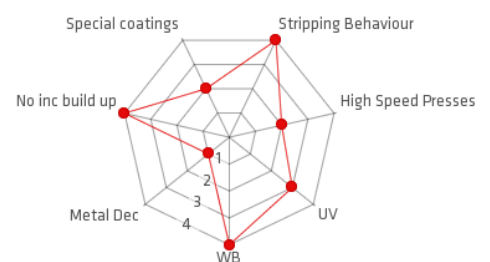

- 1 = not suggested
- 2 = suitable
- 3 = excellent
- 4 = optimum

TECHNICAL SPECIFICATION

| | |
|--------------------------|----------------------------|
| Surface | Polymer |
| Micro-Hardness | 86° Shore A |
| Thickness | 1.15 mm (0.045") |
| (Tolerance +/- 0.03mm) | 1.35 mm (0.053") |
| Stripping Depth | 1.15 mm = 0.80 mm (0.031") |
| | 1.35 mm = 1.00 mm (0.040") |
| Roll width | 1080 mm (42 1/2") |
| | 1320 mm (52") |
| Roll length | 30m / 50m |
| Carrier | Polyester PET (0.35 mm) |
| (Polyester PET / Fabric) | |

CROSS SECTION

